



NEO NACX

NEO ALUMINUM CAR TRAILER

STANDARD FEATURES

- ALL ALUMINUM
- BONDED EXTERIOR SKIN
- SEAMLESS ROOF, 16" ON CENTER
- EXTRUDED ROUND TOP COVE
- INTEGRATED TUBE FRAME CHASSIS 2 5/16" BALL
- TRIPLE TUBE TONGUE 60", TOP CRANK JACK
- 24" ATP STONEGUARD
- RADIAL TIRES 225 75 R15, SILVER MOD WHEELS
- LED LIGHTING, 2 INTERIOR DOMES
- 36" FLUSHLOCK CURBSIDE DOOR
- CAST ALUMINUM HOLDBACKS(SIDE DOOR)
- EXTERIOR GRADE PLYWOOD FLOOR 3/4"
- SELF ADJUSTING BRAKES, EZ LUBE HUBS
- 16" ON CENTER WALLS AND FLOOR
- WHITE VINYL WALLS
- PROPRIETARY BULL NOSE
- 5200# TORSION AXLES, SPREAD 42"
- DT SPOILER
- NXP STAINLESS STEEL LATCH, RAMP DOOR
- PROEDGE, TAPERED RAMP DOOR EDGE
- 4' BEAVER TAIL, 6' ON 26-28'



Upgraded 16" Wheels with 235 80 R16,
Individual Aluminum Hoop Fenders

DT Spoiler, NXP Stainless Steel Latch

The Specs

Model	Axles	Tongue Ht.	Int. Ht.	Box Length	CS Door	Rear Door
NACX2085R	2-5200lbs	22"	80.25"	20'	36"	92"W x 76.25"H
NACX2285R	2-5200lbs	22"	80.25"	22'	36"	92"W x 76.25"H
NACX2485R	2-5200lbs	22"	80.25"	24'	36"	92"W x 76.25"H
NACX2685R	2-5200lbs	22"	80.25"	26'	36"	92"W x 76.25"H
NACX2885R	2-5200lbs	22"	80.25"	28'	36"	92"W x 76.25"H



NACX-3
9.27.21



For Additional Specs & Photos, go to:


neomfg.com

e-mail: sales@neomfg.com

21900 US 12 Sturgis, MI 49091
269.503.7630

NOTE:
 DISTANCE BETWEEN WHEEL WELLS IS 82".
 TRAILER DIMENSIONS ARE WITH 5200# AXLES.
 WITH OPTIONAL 6000# AXLES TRAILER HEIGHT WILL RAISE 1".
 TRAILER HEIGHTS ARE REFERENCE AND SUBJECT TO CHANGE.

MODEL	OUTSIDE BOX LENGTH (A)	INSIDE BOX LENGTH (B)
NACX2085R	240"	238"
NACX2285R	264"	262"
NACX2485R	288"	286"
NACX2685R	312"	310"
NACX2885R	336"	334"

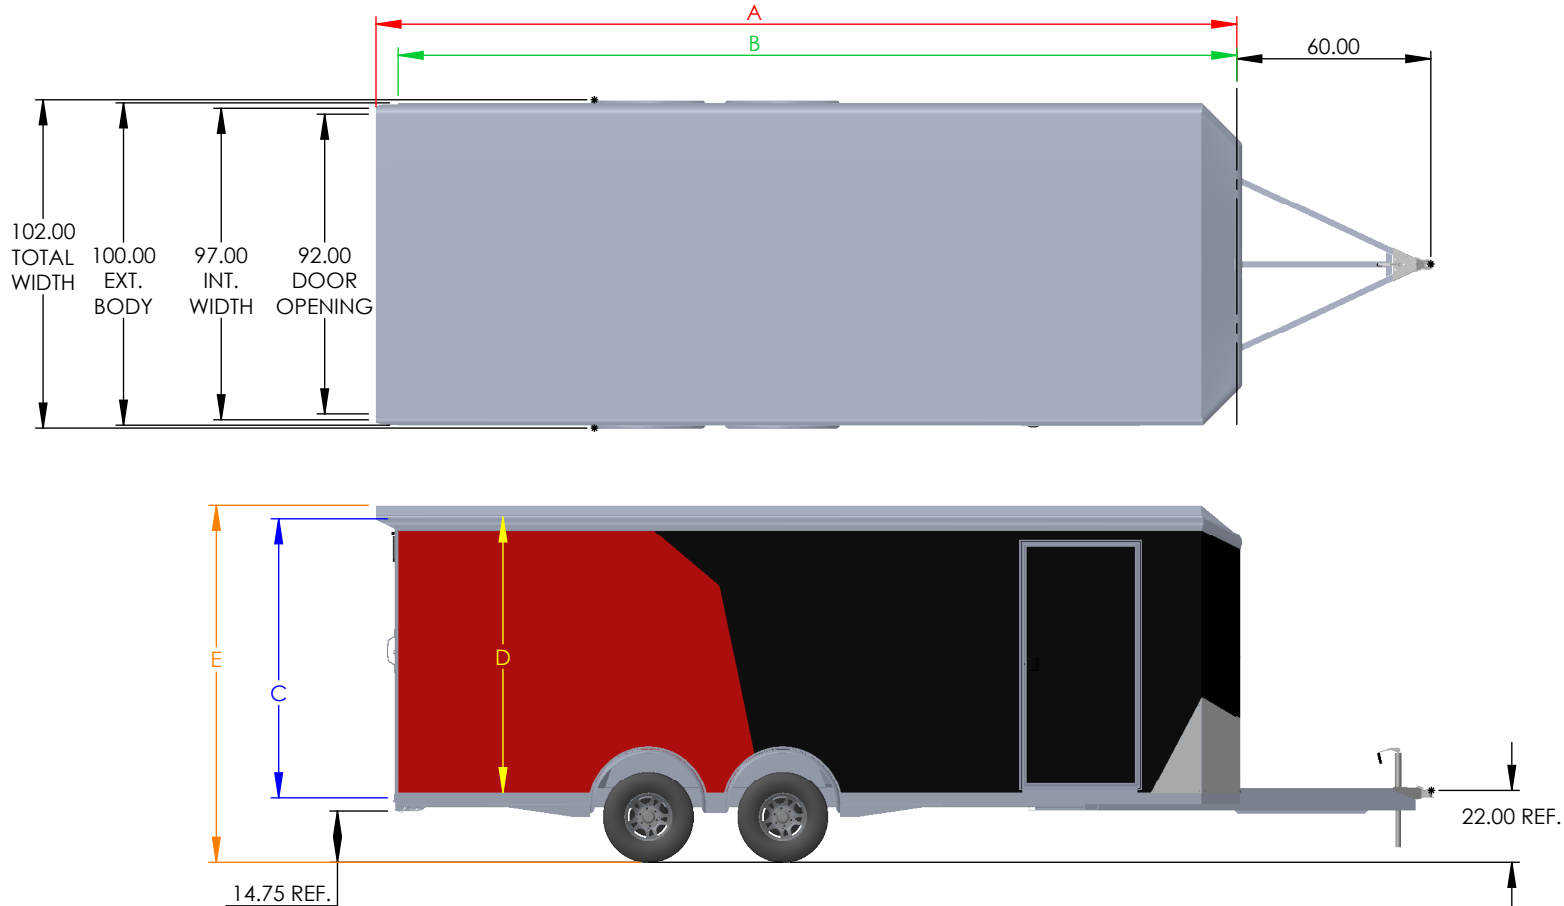

NACXR	Rear Door Hgt (C)	Int Hgt @ Center (D)	Overall Hgt (E)
STD Height	76.25"	80.25"	102.00"
6" Plus Height	82.25"	86.25"	108.00"
12" Plus Height	88.25"	92.25"	114.00"

DRAWN BY
TYLER A BOURASSA

DATE
1/11/2023

TRAILER MODEL: NACX

TITLE:
TRAILER DIMENSIONS

DO NOT SCALE DRAWING